


Stoughton Aluminum SubFrame

Objection Refute:


- > 3 Year Warranty (Design and Workmanship)
- > 2 of every 3 Stoughton Trailers sold are Aluminum Sub Frame

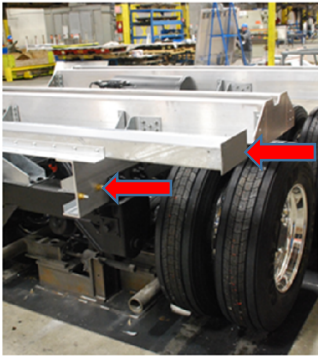

ALUMINUM SUBFRAME

Robust aluminum main beams and cross members effectively spread the load over the chassis lightening the trailer by 140 lbs.

- > SubFrame Steel Supports are Hot Dipped Galvanized which creates 100% coverage inside and out

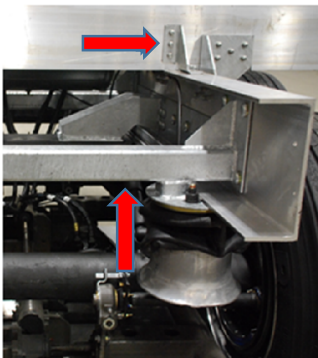

HOT DIP GALVANIZED STEEL SUPPORTS

Corrosion protected structural steel supports strengthen the aluminum sub frame at all key connection points.

- > More Corrosion Resistant than traditional steel
- > Stoughton uses more steel supports than Wilson or Timp
- > Competing Manufacturers Drill a hole in steel supports and use directional spray nozzle which limits coverage and protection
- > \$1600 of Standard options that are additional cost options with the competitor trailers
- > Work Lights, Stainless Steel Corner Caps, 8 Aluminum Wheels are standard equipment