





Fargo, ND - 800-237-5161

Model	Pup Trailer	42'	46'	46' Quad Axel
Height-Ground to Top Rail	103"	103"	103"	103"
Weight (approx.)	10,000lbs	15,025lbs	15,400lbs	18,025lbs
Closed Belly Clearance empty	12"	12"	12"	12"
Hopper Capacity	12 cu. yd.	25 cu. yd.	25 cu. yd.	25 cu. yd.
Tub Slope	65 deg.	67 deg.	67 deg.	67 deg.
King Pin Setting	N/A	17"	17"	17"
Hopper Material	7 ga AR200	7 ga AR200	7 ga AR200	7 ga AR200
Gate Material	7 ga GR50	7 ga GR50	7 ga GR50	7 ga GR50
Lower Hopper Opening	4' X 5'	10.5' X 5.5'	10.5' X 5.5'	10.5' X 5.5'
Upper Hopper Opening	9' 9.5" X 7' 4"	17' X 7' 8"	17' X 7' 8"	17' X 7' 8"

Standard Equipment

- ❖ Smooth Sidewalls Prevents Hang-up
- ❖ 25,000# Meritor Axles with ABS
- ❖ 7-Way Receptacle
- ❖ 8" Gate Cylinders
- ❖ Pendant Gate Control
- ❖ Oscillating King Pin Plate
- ❖ Push Bumper
- ❖ Non Exposed Valve Control Station
- ❖ LED Lighting and DOT Conspicuity Tape
- ❖ Hutch Suspension with 3-Leaf Heavy-Duty Springs
- ❖ Aluminum Diamond Plate Fenders
- ❖ Silver Metallic PPG Polyurethane Paint
- ❖ Gate Mounted Drop Leg Landing Gear
- ❖ One Year Factory Warranty - 5 Years on Axles/Suspension - See Dealer For Details
- ❖ Sandblast Paint Preparation
- ❖ Bolt on Front Quarter Fenders
- ❖ Protected Slack Adjusters on Axles

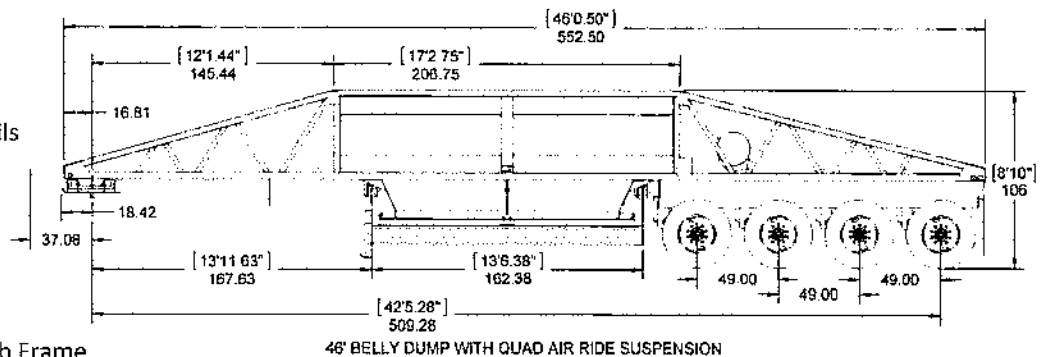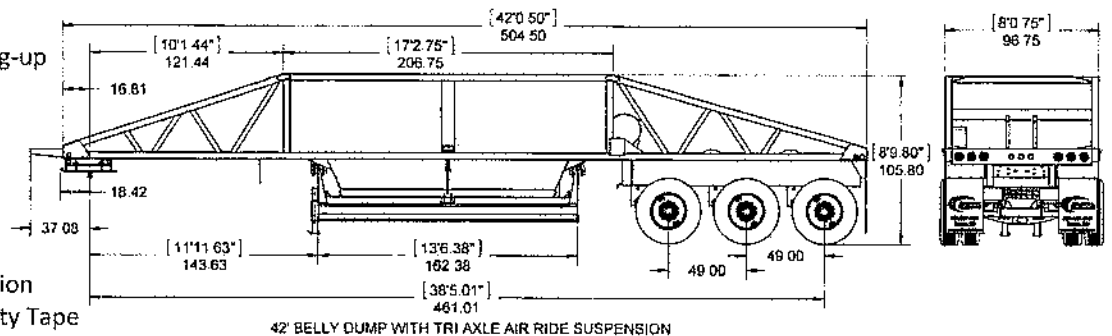

Optional Equipment

- ❖ Custom Paint and Graphics
- ❖ Chip Guard Lined Undercarriage and Sub Frame
- ❖ Rear Push Block with Bucket Deflector
- ❖ Electric or Manual Tarp - Mesh or Vinyl
- ❖ Meritor Air-Ride Suspension
- ❖ Air Suspension Quick Dump Valve
- ❖ ABS Installed On Second Axle
- ❖ Electronic Gate Stop
- ❖ Steel or Aluminum Wheel Options
- ❖ Dual or Super Single Tire Options
- ❖ Tip Top Side Board
- ❖ Axle Dust Covers
- ❖ Lift Axle
- ❖ Top Rail Cap
- ❖ Pintle Plate
- ❖ Digital Load Scale

