

# HEAVY DUTY SERIES

50,000 - 65,000 LBS. LIFT CAPACITY



- **4 year warranty**
- **Sliding jib**
- **Slide through body locks**
- **Large beveled rear rollers**
- **Dual pivot rear section**
- **Dual lift cylinders**
- **Nylatron slide pads**
- **Low pressure hydraulics**
- **Integral dual counter balance valves**
- **Designed and built in the USA**

**HEAVY DUTY SERIES**

**SWAPLOADER®**

U.S.A. LTD.

General Contractors - Landscapers - Lumber Yards - Municipals - Governmental - Rental Yards - Roofers - Waste Haulers


NOTE:

THIS D  
ILLUS

MODEL		SL-520	SL-518	SL-650
<b>MODEL DESCRIPTION</b>	DUMP CAPACITY (INCLUDING CONTAINER)	50,000 lb	54,000 lb	65,000 lb
	DUMP ANGLE	57°	57°	54°
	LIFT CAPACITY (INCLUDING CONTAINER)	50,000 lb	53,000 lb	65,000 lb
	HOIST WEIGHT	FIXED 7,055 lb	6,600 lb	8,050 lb
	HOIST WEIGHT	ADJ. 7,310 lb	6,840 lb	N/A
<b>GENERAL DIMENSIONS (SEE DIAGRAM)</b>	HOOK TO REAR ROLLER (DIM. A)	222.75"	201.0"	226.5"
	HOOK HEIGHT (DIM. B)	FIXED 61.75"	61.75"	61.75"
	HOOK HEIGHT (DIM. B)	ADJ. 61.75" / 53.88"	61.75" / 53.88"	N/A
	HOIST HEIGHT (DIM. C)	12.5"	12"	13"
	HOIST CG (DIM. D)	118.0"	108.0"	125.0"
	BODY LENGTH (DIM. E) <b>2</b>	19' - 24'	17' - 22'	20' - 24'
	OPTIMUM BODY LENGTHS <b>2</b>	20' - 22'	18' - 20'	20' - 22'
	BODY LONGSILL WIDTH <b>3</b>	40.5" / 41.63"	40.5" / 41.63"	40.5" / 41.63"
	<b>HYDRAULIC SYSTEMS</b>	HYDRAULIC PUMP TYPE (CID)	Gear (4.46)	Gear (4.46)
FLOW @ PUMP RPM <b>6</b>		26.0 GPM @ 1,500 RPM	26.0 GPM @ 1,500 RPM	26.0 GPM @ 1,500 RPM
RELIEF PRESSURE		3,500 PSI	3,500 PSI	3,500 PSI
HYDRAULIC RESVR.		30 gal	30 gal	30 gal
<b>LIFT CYLINDER</b>	TYPE	ALL MODELS INCORPORATE TWIN, DOUBLE ACTING CYLINDERS WITH DUAL BUILT-IN COUNTERBALANCE VALVES.		
	QUANTITY	2	2	2
	BORE	Ø 7"	Ø 7"	Ø 7.5"
	STROKE	82"	74"	82"
<b>JIB CYLINDER</b>	TYPE	ALL MODELS INCORPORATE A SINGLE, DOUBLE ACTING CYLINDER WITH A SINGLE BUILT-IN COUNTERBALANCE VALVES.		
	QUANTITY	1	1	1
	BORE	Ø 4.5"	Ø 4.5"	Ø 4.5"
	STROKE	52"	48"	52"
<b>TRUCK SPECS (RECOMMENDED)</b>	GVW RANGE	50,000 lb or greater	50,000 lb or greater	55,000 lb or greater
	CAB-AXLE DIM. (SINGLE AXLE) <b>4</b>	N/A	N/A	N/A
	CAB-TRUNION DIM. (TANDEM AXLE) <b>4</b>	176" - 190"	165" - 174"	172" - 190"
	TRUCK FRAME RBM	2,500,000 in lb	2,500,000 in lb	2,750,000 in lb
	CLEAR FRAME RAIL <b>5</b>	245"	225"	249"
<b>PTO SPECS (RECOMMENDED)</b>	FRAME HEIGHT	up to 45"	up to 45"	up to 45"
	PUMP MOUNT <b>7</b>	Direct Mount SAE B, 4 Bolt	Direct Mount SAE B, 4 Bolt	Direct Mount SAE B, 4 Bolt
	TORQUE REQUIRED	230 ft-lbf	230 ft-lbf	230 ft-lbf

- 4 year warranty
- Sliding jib
- Slide through body locks
- Large beveled rear rollers
- Dual pivot rear section
- Rugged main frame
- Dual lift cylinders
- Nylatron slide pads
- Low pressure hydraulics
- Rigorous 4 year test cycle
- Integral Dual Counter Balance Valves
- Designed and Built in the USA

- 1 Jib Lock out valve to prevent jib operation in dump mode standard.
- 2 Hoist with longer bodies may not conform with I.C.C. bumper regulations or may not achieve maximum dump angle depending on truck chassis height. Contact your SwapLoader distributor for more information.
- 3 Maximum outside to outside longsill width.
- 4 Optimum CA/CT dimension will be influenced by type of loads carried and turning radius requirements.
- 5 Clear frame Dim given is the overall length of hoist plus 5" for cab clearance and rear light bar mounting. Additional frame length may be necessary for other accessories such as cab guard, tarper, exhaust system, etc.
- 6 Pump RPM and Flow are dependent on engine RPM and PTO ratio.
- 7 PTO/Pump rotation as determined by transmission.
- 8 Polished Nitrided Cylinder Rod.

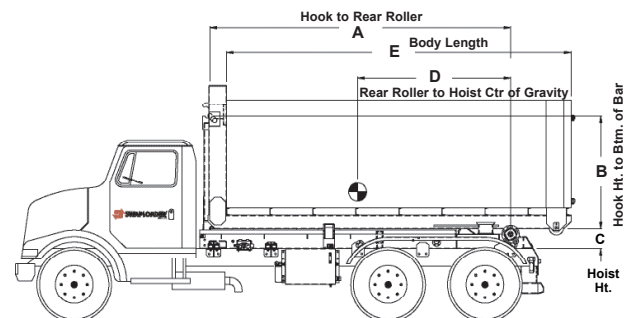

SwapLoader USA, Ltd.  
 1800 N.E. Broadway Ave.  
 Des Moines, IA 50313  
 Ph: 515-266-3042  
 Fax: 515-313-4426  
 Toll Free: 888-767-8000

Your authorized SwapLoader dealer

Ask about the wide range of available SwapLoader models