



Gondola Trailer



HARDOX®

WEAR PLATE

**helps us provide you the
most durable trailer in
the industry!**

**The lightweight
alternative
for hauling
scrap**



1-888-274-6010

www.maurermfg.com

Trailer with HARDOX® Wear Plate

Wall Material	1/8" HARDOX 450			
Floor Material	3/16" HARDOX 450			
Side Wall Height	4' wall	5' wall	6' wall	8' wall
40' Trailer Length:				
Cubic Yards Capacity	45	n/a	n/a	90
Tare Weight in Pounds	15,460	n/a	n/a	19,140
44' Trailer Length:				
Cubic Yards Capacity	53	66	78	104
Tare Weight in Pounds	16,640	17,690	18,740	20,840
48' Trailer Length:				
Cubic Yards Capacity	57	71	85	113
Tare Weight in Pounds	17,820	18,875	19,930	22,040
Trailer Height:				
All Lengths	8'8"	9'8"	10'8"	12'8"

Trailer with Mild Steel

Wall Material	11 ga. Mild Steel				
Floor Material	3/16" A656 Grade 80 Plate				
Side Wall Height	3' wall	4' wall	5' wall	6' wall	8' wall
40' Trailer Length:					
Cubic Yards Capacity	33	45	57	68	90
Tare Weight in Pounds	14,540	15,460	16,380	17,300	19,140
Trailer Height	7'8"	8'8"	9'8"	10'8"	12'8"
Gross Vehicle Weight Rating (GVWR)					
					68,000 lbs.
Brake size					16.5" x 7"
Bumper height					22"
Cross members					S5 10# I-beam on 18" centers
Wall posts					3" x 3" 7 ga. tube on 24" centers
Bottom wall rail structural tube					3" x 6" x 1/4"
Top wall rail structural tube					3" x 3" 7 ga.
Kingpin height 49" - Kingpin setting 24" std., 36" available					
Landing leg clearance of 98" with 24" kingpin setting					




Standard Features

- 22.5K tandem axles with 1 axle ABS brake
- 3 Leaf heavy duty suspension, closed tandem
- Sealed wiring system-designed for Maurer by Trucklite
- Color coded break lines
- 2-speed landing gear
- Phosphate washed for superior paint adhesion
- All exterior mating surfaces are caulked prior to paint
- Diamond Vogel polyurethane primer and paint
- D.O.T. approved conspicuity tape and rubber mounted lights
- Manifest holder
- Anti-sail mudflaps

Options

- ABS installed on second axle
- LED light kit (I.L.O. standard light)
- Load binder- double rear door
- Suspensions:
 - Spring ride - 10.1 spread
 - Air ride - closed tandem
 - Air ride - 10.1 spread
 - Manual dump valve - air ride
 - Scale - air ride
- 25K tandem axles - 80,000 lb. GVWR with 8.62" brakes (I.L.O. 7" brakes) requires Load Range (LR) H tires
- Spare tire carrier
- Aluminum rims

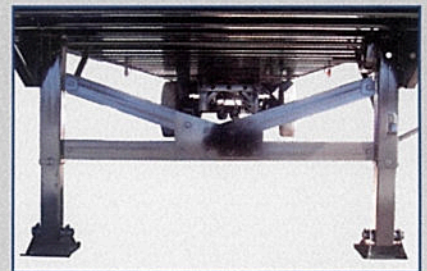

MAURER
MANUFACTURING

P.O. Box 160
1300 38th Avenue West
Spencer, IA 51301
View all our products on the web at:
www.maurermfg.com

888-274-6010