


Neville Built Dropdeck Standard Sizes

Overall Length	Top Deck	Pin Setting	# of Axles	Main Deck Length	Trailer Wt.	GVW	Beavertail
39'	10'	18"	1	24'	9,600#	25,500# uniform	5' 2 ramps
42'	11'	24"	2	26'	11,900#	68,000# uniform 50,000# in 10'	5" 2 ramps
45'	11'	24"	2	29'	12,500#	68,000# uniform 50,000# in 10'	5" 2 ramps
48'	11'	24"	2	32'	13,200#	68,000# uniform 50,000# in 10'	5" 2 ramps
50'	11'	24"	2	34'	13,800#	68,000# uniform (40,000# in 20') or 50,000# in 10' optional	5" 2 ramps
53'	11'	30"	2	37'	14,200#	68,000# uniform (40,000# in 20') or 50,000# in 10' optional	5" 2 ramps

**53' x 102"
Dropdeck, closed
tandem spring ride,
5' beavertail
with 3 ramps**

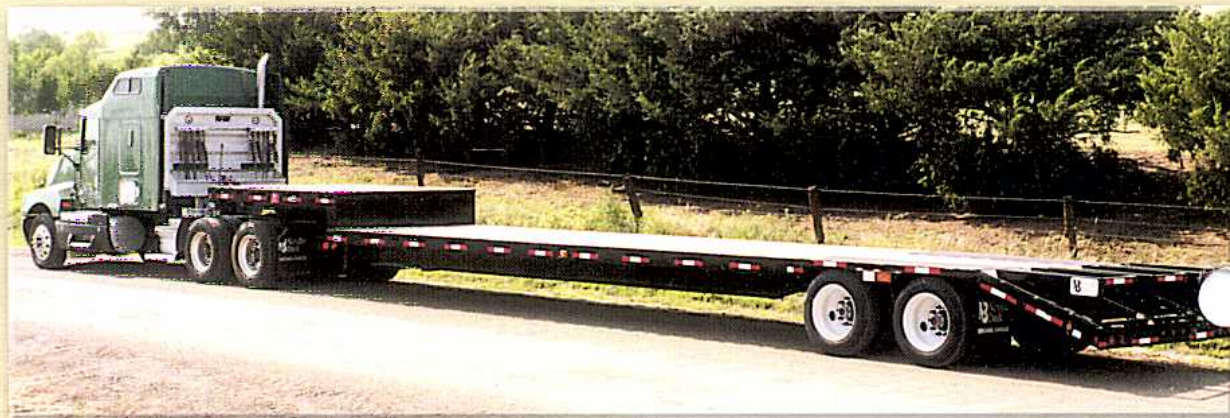

53' Dropdeck, spread axle with

Standard Features

- 102" wide decks
- 5' Beavertail with 2 folding ramps
- Spring assist for ramps
- New 25,000# axles, 16 $\frac{1}{2}$ " x 7" brakes, outboard drums, hub pilot
- Hutch spring suspension (3 leaf springs)
- Dual certified high strength wide flange frames
- 5" Hi tensile I-beam crossmembers on top and lower decks - 16" on center
- 1 $\frac{1}{4}$ " oak floor
- 255/70R22.5 radial tires (new virgin)
- Anti-lock brakes system - Rockwell Wabco
- 2-speed/50,000# landing legs
- All required ICC lights and reflective tape
- Stake pockets on 24" centers with 3/8" x 2" rubrail
- Sealed wiring harness