

A Dorsey's More Durable



BODY STRUCTURE

Capacity: 80,000 lbs GVWR (60,000 lbs in 10')

▶ Weight: 10,600 lbs +/- 3%

Length: 48' or 53'
Width: 102" Overall
Coupler Height: 48"
King Pin: 2" AAR
King Pin Setting: 18"

Main Beams: Fabricated High Tensile SteelFlanges: Grade 130 High Tensile Steel

Web: Grade 80 High Tensile Steel, One PieceFront Skirt: Formed Steel with Tapered Corners

Front Skirt: Formed Steel with Tapered Corners
 Rear Skirt: Extruded Aluminum with Integrated Stake Pockets

► Bumper: US DOT and Transport Canada Compliant Rear Impact

bulliper. 03 DOT and transport Canada Compilant Real Impact

Cross Members: Grade 80 High Tensile 4" Steel I-beam on 12" Centers

▶ Heavy Duty Coil Package: 4' Span, Center of Trailer

► Cross Member Knee Brace: Fabricated One Piece Steel on 60" Centers

▶ Side Rail: Extruded Aluminum with Integrated Double L

▶ Rub Rail: 3/8" X 3" Aluminum with Recessed Conspicuity Tape

► Stake Pockets: Aluminum, External Mount, 24" on Center with Double Pipe Spools

► Floor: Extruded Aluminum with (4) Nailers

▶ Load Securement: Extruded Double L (Road Side) with (12) Winches

▶ Mud Flaps: Heavy Duty, White, Anti-spray, Anti-sail

Paint: White Blasted, Two Part Primer, Two Part Dorsey Black Acrylic Urethane

▶ **Lighting**: Grote LED Sealed Lights, Grote Sealed Wiring Harness

COMPONENTS

Landing Gear: Heavy Duty 2-speed Gear Drive, 140,000 lbs Static Load Capacity

Suspension: Air Ride, 23,000 lbs Capacity
 Axles: Heavy Duty, 23,000 lbs Capacity

▶ ABS Brakes: 2S/1M

Brakes: 16 1/2" X 7" Quick Change

► Hubs: Standard Cast, Hub Piloted, 10-stud Unimount, Oil Lubricated

Brake Drums: Standard Cast, Outboard Mount

▶ Wheels: Hub Piloted Steel

► Tires: 255/75R22.5 Double Coin Radials

OPTIONS

► Heavy Duty Beam Packages

Lift Axles

Intermodal Container Twist-locks

Toolbox(es): Steel or Aluminum

D Rings

Strobe Lights

Wide Load Lights

Custom Light Package

▶ Hubodometer


Tire Inflation System

Bulkhead: Steel or Aluminum

Aluminum Floor Sills

▶ Aluminum Front Skirt

MODEL: DC-48

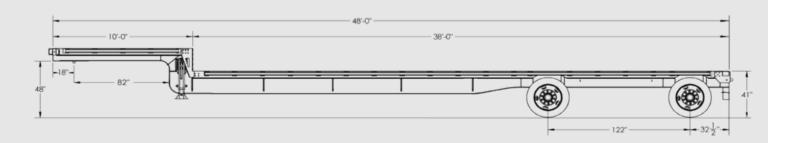



DORSEYTRAILER.NET





LEARN MORE ABOUT DORSEY TRAILER AND JOIN US ON FACEBOOK

334.897.2525

ELBA, AL

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment. Axle placement and legal load ratings are dependent upon federal, state, and local regulations, GAWR and tire ratings.

Copyright © 2014 Pitts Enterprises, Inc. (published). Pate. All rights reserved.